




- High efficiency
- High strength and rigidity
- High dynamic and thermal stability
- Long lasting high accuracy
- High reliability
- Model flexibility
- Ecologically friendly

# H 800


## TECHNICAL DATA



The **H 800** production horizontal machining centre is utilizable for the whole range of technologies from the power up to the high-speed machining.

- outstanding characteristic of damping and absorption of mechanical vibrations
- maximum rigidity and maximum value of natural frequencies of movable parts
- machine dynamical and thermal stability necessary for the modern progressive technology of machining
- machine modern design – linear guideways in all axes and ecological grease lubrication of guideways and ball screws

The machine conception includes the T-shape bed with slidable column (X-axis) along which moves the spindle head in the vertical direction (Y-axis). The movement in the Z-axis is carried out by the rotary table (B-axis) with a workpiece.

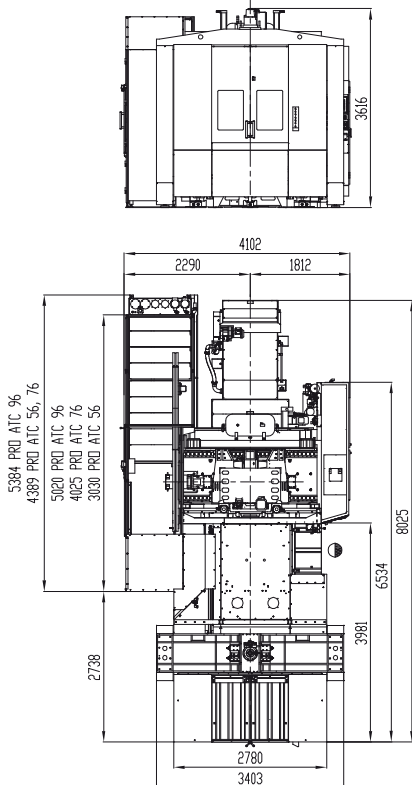

Machine with cassette-type tool magazine

### Travels

X-axis (column)	1 000 mm
Y-axis (spindle head)	1 050 mm
Z-axis (table)	1 200 mm
Max. working feed	50 m/min
Rapid traverse	50 m/min
Acceleration	5 m/sec <sup>2</sup>

### Spindle

	ISO 50	ISO 50	HSK-A63	HSK-A100
Tool interface	ISO 50	ISO 50	HSK-A63	HSK-A100
Maximum speed	8 000 rpm	4 500 rpm*	18 000 rpm*	14 000 rpm*
Power output continuous S1 / overload S6 – 40 %	28/43 kW	17/25 kW	25/31 kW	25/37 kW
Torque S1 / overload S6 – 40 %	342/526 Nm	893/1 313 Nm	159/197 Nm	159/236 Nm
Transmission type	planetary gearbox		electrospindle	electrospindle

### Rotary table with pallet

Pallet dimensions	800 × 800 mm
Range of turning	360 °
Pallet max. load	2 500 kg
Workpiece max. size (diameter × height)	∅ 1 100 × 1 300 mm
Pallet change time	20 sec

### Measuring accuracy (VDI/DGQ 3441)

Positioning accuracy (P)	0.008 mm
Repeatability (Ps max.)	0.005 mm
NC table positioning accuracy (P)	6 arc sec

### Distances

Spindle nose to rotary table axis	100 – 1 300 mm
Spindle axis to pallet clamping surface	70 – 1 120 mm
Working pallet to floor	1 250 mm

### Tool magazine

Number of tool pots in magazine	56
Tool interchange time	3.5 sec
Tool maximum diameter:	
– fully occupied magazine	125 mm
– without adjacent tools	250 mm
Tool maximum length	650 mm
Tool maximum weight	30 kg

### Power supplies

Nominal voltage of mains	3 × 400 V/50 Hz, 3 × 480 V/60 Hz
Operational power input (depending on spindle and equipment)	35 / 48 / 53 / 66 kVA
Compressed air	0.6 – 0.8 MPa

### Complementary data

Machine floor layout	8 025 × 4 102 mm
Machine maximum height	3 616 mm
Machine weight	31 000 kg

### Control system


SIEMENS, HEIDENHAIN\*, FANUC\*

### STANDARD EQUIPMENT

- Direct measuring in X, Y, Z, B axes
- Electronic compensation of thermal dilatations
- Coolant unit for washing-off and tool cooling
- Tool outer cooling
- Air blasting of spindle hollow for tool clamping
- Worm-gear drive of rotary table (B-axis)
- Worm chip conveyors (2 pcs)
- Central rake-type chip conveyor
- Tool magazine – 56 tool pots
- Automatic pallet changer
- 2 pallets 800 × 800 mm
- Machine complete covering

### OPTIONAL EQUIPMENT\*

- Spindle for BIG-PLUS tools
- Chip container
- Work zone washing-off
- Coolant unit with filtration unit for tool cooling through spindle axis
- Tool cooling with oil mist
- Tool dimension checking probe
- Workpiece dimension checking probe
- Rotary table – 5<sup>th</sup> axis
- Tool magazine – 76, 96, 246 tools
- Supply of hydraulics into pallet
- Vapour exhaustion from work zone
- Hand-operated washing-off guns
- Collector of oil from coolant surface
- Climatization of electrical cabinet
- Tool management
- Rotary glass wiper
- Torque motor drive of B-axis rotary table
- Remote diagnostics
- Vibrodiagnostics

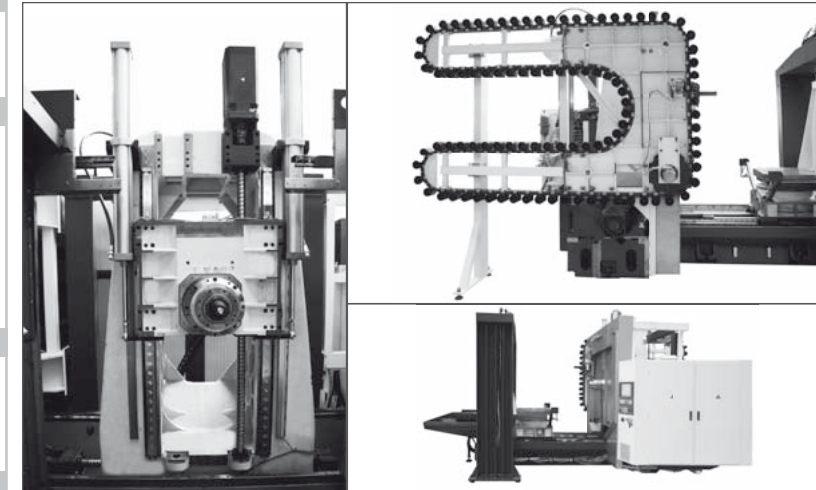

Descriptions of illustrations and specifications may not always correspond with the machine latest version.

Manufacturer  
**TAJMAC-ZPS, a. s.**  
 třída 3. května 1180  
 763 02 Zlín, Malenovice  
 CZECH REPUBLIC  
 Tel: +420 577 532 072  
 Fax: +420 577 533 626  
 www.tajmac-zps.cz  
 e-mail: info@tajmac-zps.cz

Holding  
**TAJMAC-MTM, S. p. a.**  
 Via Gran Sasso 15  
 20092 Cinisello Balsamo (Mi)  
 ITALY  
 Tel: + 39 02 66017878  
 Fax: + 39 02 66011457  
 www.tajmac-mtm.it  
 e-mail: tajmac@tajmac-mtm.it