




# MANURHIN K'MX 532TREND

Innovative technology

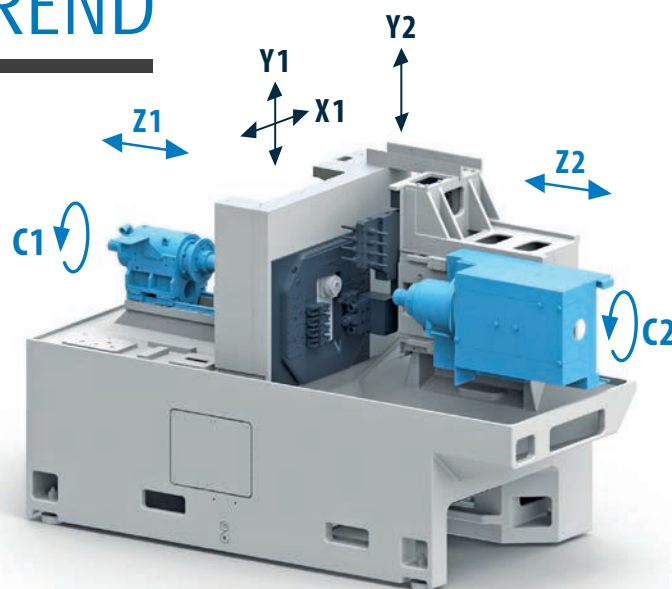



MANURHIN K'MX 532TREND

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
25 sec.	28 sec.	32 sec.	47 sec.




MANURHIN K'MX 532TREND

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
22 sec.	24 sec.	29 sec.	45 sec.





MANURHIN K'MX 532TREND

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
27 sec.	30 sec.	35 sec.	47 sec.

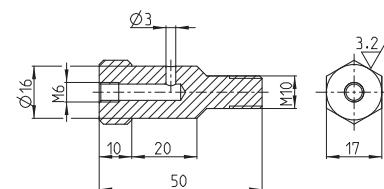


MANURHIN K'MX 532TREND

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
55 sec.	57 sec.	66 sec.	106 sec.



MANURHIN K'MX 532TREND

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
28 sec.	31 sec.	34 sec.	43 sec.



MANURHIN K'MX 532TREND

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
22 sec.	24 sec.	27 sec.	37 sec.

Cycle time is calculated for standard cutting tools, without any special technology, without high pressure coolant and primary with focus on optimal longevity of used cutting tools.