




# MANURHIN K'MX 632

Innovative technology

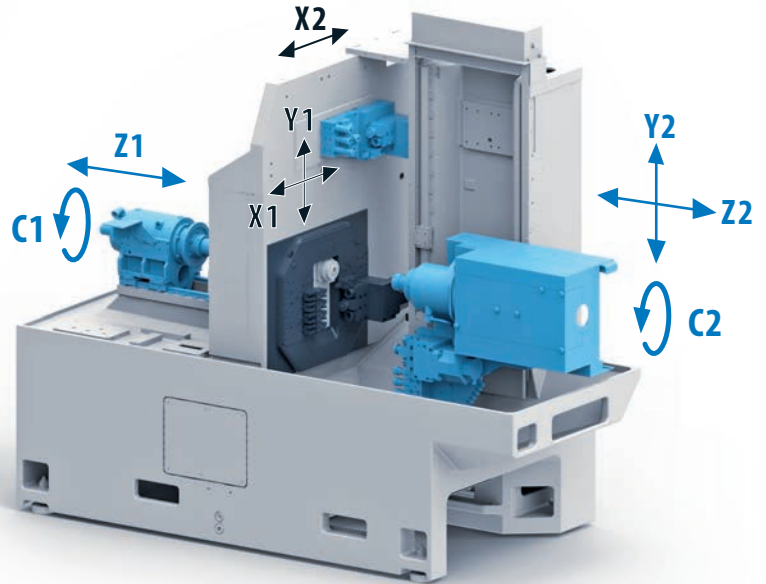


MANURHIN K'MX 632

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
19 sec.	20 sec.	23 sec.	35 sec.





MANURHIN K'MX 632

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
42 sec.	49 sec.	54 sec.	73 sec.

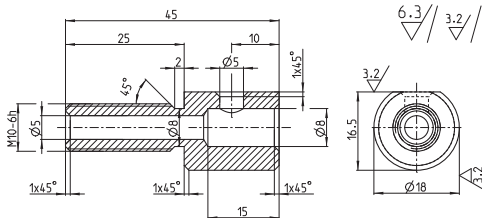


MANURHIN K'MX 632

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
32 ec.s	34 sec.	39 sec.	50 sec.

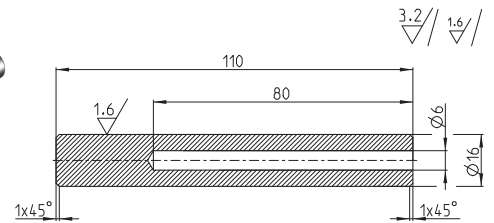



MANURHIN K'MX 632

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
34 sec.	35 sec.	41 sec.	61 sec.



MANURHIN K'MX 632

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
39 sec.	42 sec.	53 sec.	77 sec.

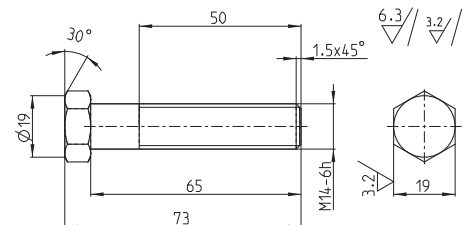

MANURHIN K'MX 632

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
43 sec.	46 sec.	54 sec.	77 sec.

Cycle time is calculated for standard cutting tools, without any special technology, without high pressure coolant and primary with focus on optimal longevity of used cutting tools.