




MANURHIN K'MX 816CLEVER

Innovative technology

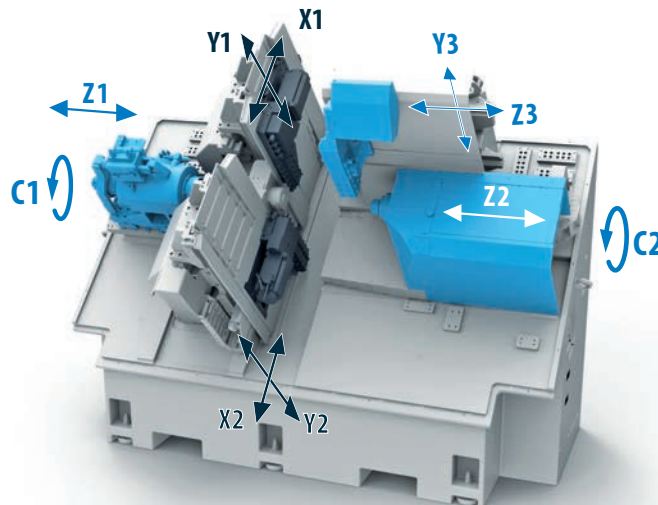



MANURHIN K'MX 816CLEVER

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
12 sec.	13 sec.	14 sec.	16 sec.





MANURHIN K'MX 816CLEVER

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
13 sec.	15 sec.	16 sec.	18 sec.





MANURHIN K'MX 816CLEVER

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
18 sec.	19 sec.	25 sec.	34 sec.

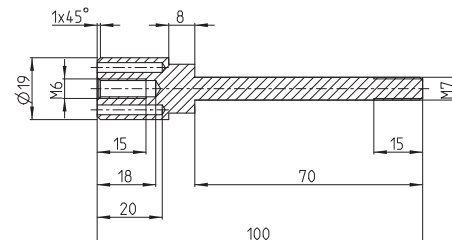


MANURHIN K'MX 816CLEVER

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
27 sec.	37 sec.	49 sec.	83 sec.

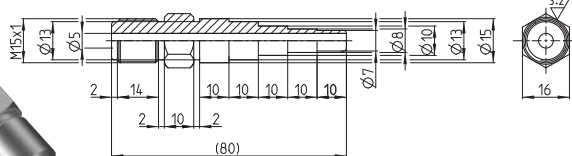

MANURHIN K'MX 816CLEVER

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
34 sec.	38 sec.	49 sec.	72 sec.

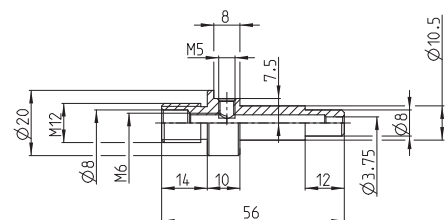

MANURHIN K'MX 816CLEVER

Aluminium	Brass	Automatic steel	Stainless steel
EN AW 6061	CuZn39Pb3	1.0737	1.4301
32 sec.	38 sec.	40 sec.	51 sec.

Cycle time is calculated for standard cutting tools, without any special technology, without high pressure coolant and primary with focus on optimal longevity of used cutting tools.